


PP TCX GLOSS WHITE CAV 60 / AP901 / WG62

PRODUCT  
DESCRIPTION /  
BENEFITS

**Face :** Gloss white top coated cavitated polypropylene.

**Adhesive :** Acrylic permanent adhesive featuring high clarity and cohesion with strong adhesion to polar and apolar substrates (like PE and PP). This adhesive complies with UNI EN ISO 10993-10:2004 (Skin sensitization and irritation test). Ideal for "no label look" effect combined with PET release liner.

**Liner :** White supercalendered glassine paper one side sili-conised. There may be slight variations in tone.

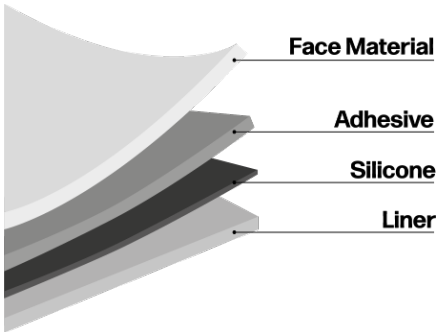

TYPICAL USE

- Food
- Home & Personal Care

PRINTING &  
CONVERTING

Suited to provide top printing quality in all usual conventional processes (flexo, screen, offset, gravure, hot-stamping, TTR) standard and low migration UV inks. Suitable for UV Inkjet printing. Testing for suitability between media, printers and inks is always recommended prior to use.

PRODUCT  
RECOMMENDATIONS

For high-end applications on rigid and semirigid PE and PP bottles. Ideal for the cosmetics industry. Not recommended for fan-folding applications.

SHELF LIFE

2 years, under storage conditions as defined by FINAT section 2.5 (20-25°C, 40-50% RH). Prolonged storage at higher temperatures and/or humidity levels will shorten the shelf life of the product.

PP TCX GLOSS WHITE CAV 60 / AP901 / WG62

PHYSICAL  
PROPERTIES / TYPICAL  
VALUES

| FACE MATERIAL             |             |            |
|---------------------------|-------------|------------|
| PP TCX GLOSS WHITE CAV 60 |             |            |
| Grammage                  | 40 Gr/m2    | ISO 536    |
| Thickness                 | 57 µm       | ISO 534-80 |
| Finishing                 | Gloss White |            |

| ADHESIVE                  |            |      |
|---------------------------|------------|------|
| AP901                     |            |      |
| Tack Glass                | 8 N        | FTM9 |
| Min Labelling temperature | -5 °C      |      |
| Usage Temperature         | -40/+80 °C |      |
| Peel Value Glass-24 hours | 7 N/25mm   | FTM2 |

| LINER     |          |            |
|-----------|----------|------------|
| WG62      |          |            |
| Grammage  | 58 Gr/m2 | ISO 536    |
| Thickness | 51 µm    | ISO 534-80 |

QUALITY  
CERTIFICATIONS &  
APPROVALS

- Suitable for direct food contact with dry, moist and such kind of fatty foodstuffs with a correction factor of at least 3. More information available on request. Complies with the requirements of BS 5609, Section 2, Part 4.1 (marine performance type test).

DISCLAIMER

Information on physico-chemical characteristics and values in this document are based upon tests we believe to be reliable and do not constitute a warranty. They are intended only as a source of information and are given without guarantee and do not constitute a warranty. Purchasers should independently determine, prior to use, the suitability of this material to their specific use. All technical data are subject to change. All Fedrigoni products are sold subject to terms and conditions of sale. For more information, contact your Fedrigoni sales representative. In case of any ambiguities or differences between the English and foreign versions of this document, the English version shall be prevailing and leading.