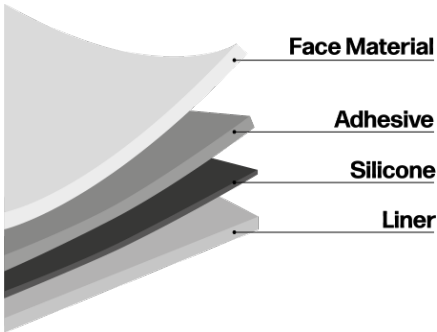


COATED 70 FSC™ / FH21 / YG60

PRODUCT DESCRIPTION / BENEFITS	FACE MATERIAL: Semi-gloss white coated paper. FSC Certified.	
	ADHESIVE: Permanent rubber based hot-melt adhesive. Good adhesion to a wide variety of substrates and to non-polar surfaces. Designed for application where very high initial adhesion is required. Excellent behaviour in runnability and labels converting. Good performance at low temperature. LINER: Honey supercalendered glassine paper one side sili-conised. There may be slight variations in tone.	
TYPICAL USE	▪ Food ▪ Home & Personal Care	
PRINTING & CONVERTING	Suitable for printing in Flexography, Offset, Screen, hot-foil and Thermal Transfer. For thermal transfer printing, print quality depends on the correct selection of the ribbon. Testing for suitability between media, printers and inks is always recommended prior to use.	
PRODUCT RECOMMENDATIONS	Multipurpose labels for industrial use. Not recommended for labelling curved surfaces with small diameters.	
SHELF LIFE	2 years, under storage conditions as defined by FINAT section 2.5 (20-25°C, 40-50% RH). Prolonged storage at higher temperatures and/or humidity levels will shorten the shelf life of the product.	

COATED 70 FSC™ / FH21 / YG60

PHYSICAL
PROPERTIES / TYPICAL
VALUES

FACE MATERIAL		
COATED 70 FSC™		
Grammage	70 Gr/m2	ISO 536
Thickness	59 µm	ISO 534-80
Dry Opacity	85 %	ISO 2471
ADHESIVE		
FH21		
Tack Glass	14 N	FTM9
Min Labelling temperature	0 °C	
Usage Temperature	-40/+60 °C	
Peel Value Glass-24 hours	9 N/25mm	FTM2
LINER		
YG60		
Grammage	54 Gr/m2	ISO 536
Thickness	46 µm	ISO 534-80

QUALITY
CERTIFICATIONS &
APPROVALS

- Suitable for direct food contact with dry and moist, non-fatty food. More information available on request.
- FSC License code: FSC-C106281

DISCLAIMER

The information on physico-chemical characteristics and values in this document is based on tests we believe to be reliable, but it is provided without guarantee and does not constitute a warranty. It is intended solely for informational purposes. Purchasers should independently determine the suitability of this material for their specific use prior to application. All technical data are subject to change without notice. All Fedrigoni products are sold in accordance with the applicable terms and conditions of sale. For further information, please contact your Fedrigoni sales representative. In case of any ambiguities or discrepancies between the English version of this document and any translations, the English version shall prevail.