


**VELLUM SC FSC™ / P1000 / YG60**

**PRODUCT  
DESCRIPTION /  
BENEFITS**

**Face :** White woodfree calendered paper. FSC certified.  
**Adhesive :** General purpose permanent acrylic water based adhesive. Good adhesion to a wide variety of substrates, including non-polar surfaces. Good behaviour at low temperatures.  
**Liner :** Honey supercalendered glassine paper one side sili-conised. There may be slight variations in tone.

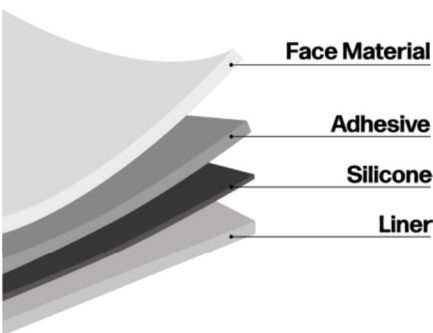

**TYPICAL USE**

- Food
- Transport & Logistics

**PRINTING &  
CONVERTING**

Suitable for printing in Flexography, Offset, Screen, hot-foil and Thermal Transfer. Testing for suitability between media, printers and inks is always recommended prior to use.

**PRODUCT  
RECOMMENDATIONS**

General all-purpose paper. Excellent printability with all conventional printing systems. Suitable for EDP applications and for thermal transfer printing.

**SHELF LIFE**

2 years, under storage conditions as defined by FINAT section 2.5 (20-25°C, 40-50% RH). Prolonged storage at higher temperatures and/or humidity levels will shorten the shelf life of the product.

**VELLUM SC FSC™ / P1000 / YG60**

PHYSICAL PROPERTIES /  
TYPICAL VALUES

| FACE MATERIAL             |            |            |
|---------------------------|------------|------------|
| VELLUM SC FSC™            |            |            |
| Grammage                  | 70 Gr/m2   | ISO 536    |
| Thickness                 | 75 µm      | ISO 534-80 |
|                           |            |            |
| ADHESIVE                  |            |            |
| P1000                     |            |            |
| Tack Glass                | 11 N       | FTM9       |
| Min Labelling temperature | 0 °C       |            |
| Usage Temperature         | -35/+70 °C |            |
| Peel Value Glass-24 hours | 10 N/25mm  | FTM2       |
|                           |            |            |
| LINER                     |            |            |
| YG60                      |            |            |
| Grammage                  | 55 Gr/m2   | ISO 536    |
| Thickness                 | 48 µm      | ISO 534-80 |

- QUALITY CERTIFICATIONS & APPROVALS
- Suitable for direct food contact with dry and moist, non-fatty food. More information on request.
  - FSC License code: FSC-C106281

DISCLAIMER

Information on physico-chemical characteristics and values in this document are based upon tests we believe to be reliable and do not constitute a warranty. They are intended only as a source of information and are given without guarantee and do not constitute a warranty. Purchasers should independently determine, prior to use, the suitability of this material to their specific use. All technical data are subject to change. All Fedrigoni products are sold subject to terms and conditions of sale. For more information, contact your Fedrigoni sales representative. In case of any ambiguities or differences between the English and foreign versions of this document, the English version shall be prevailing and leading.